


整理番号 = P - 2 2 1 0

特願200

Fig. 1

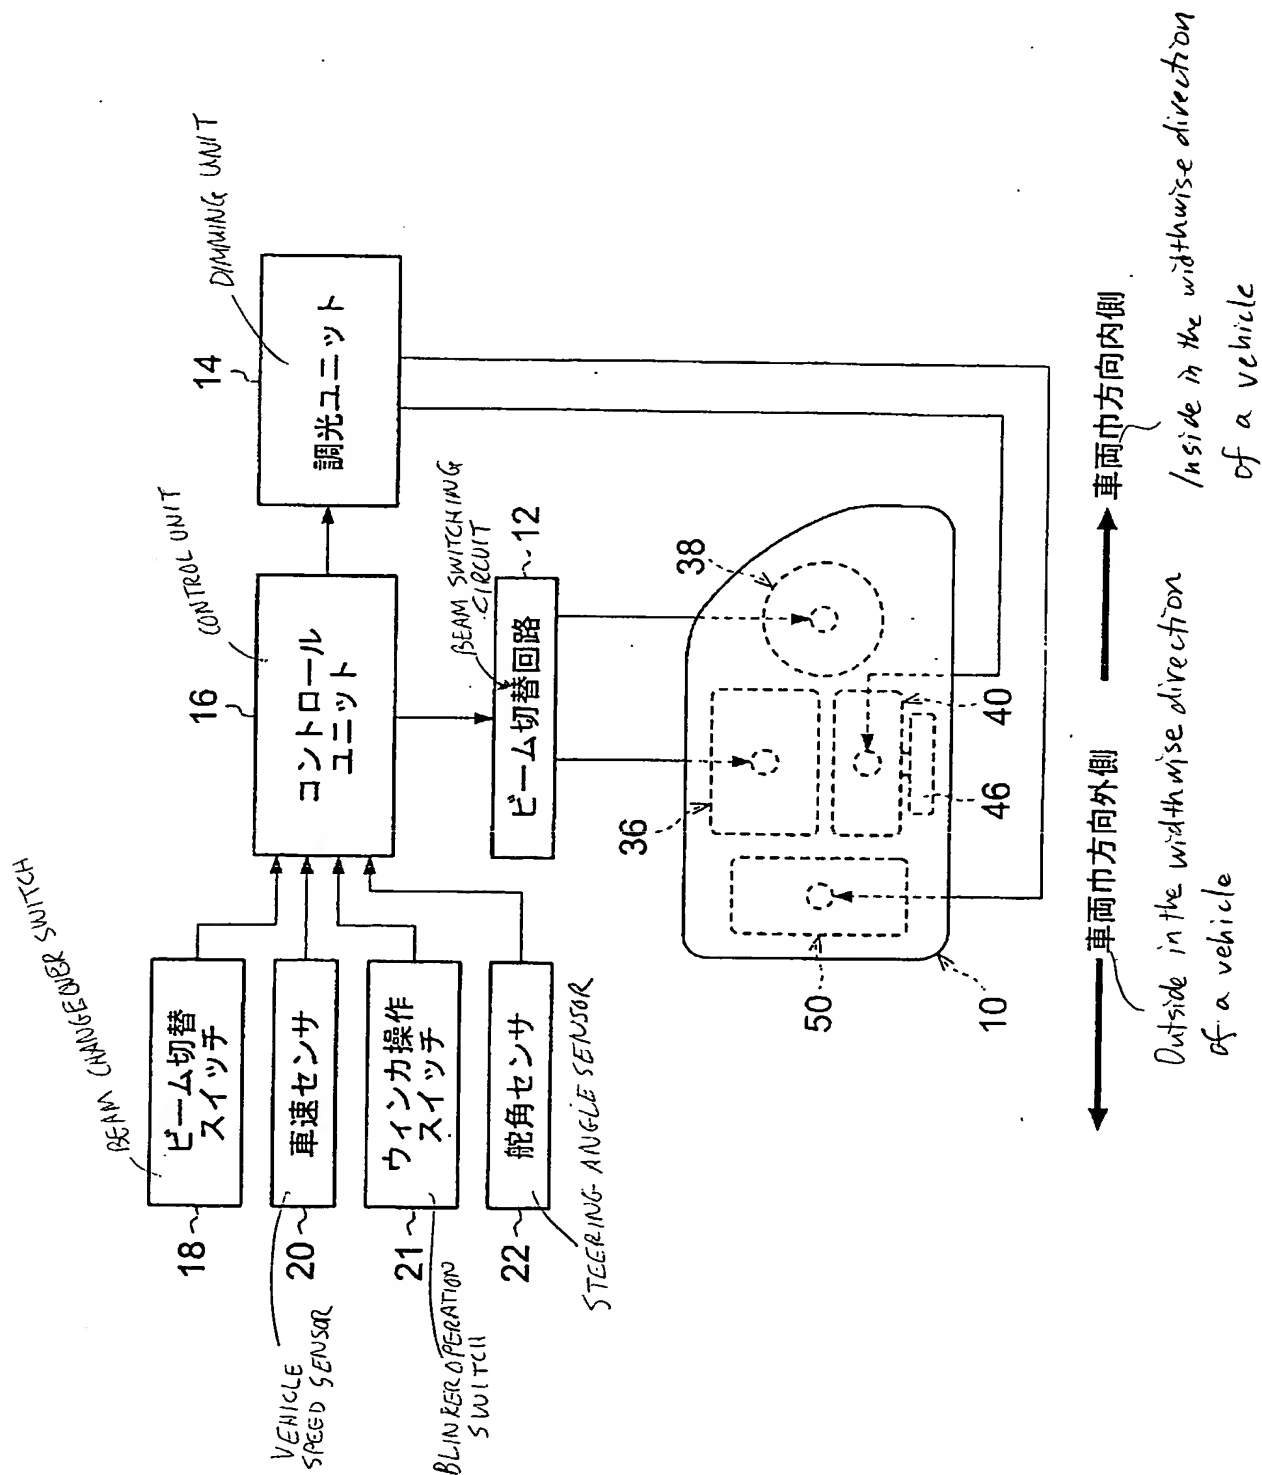

整理番号 = P - 2 2 1 0

特願2003-

Fig. 2

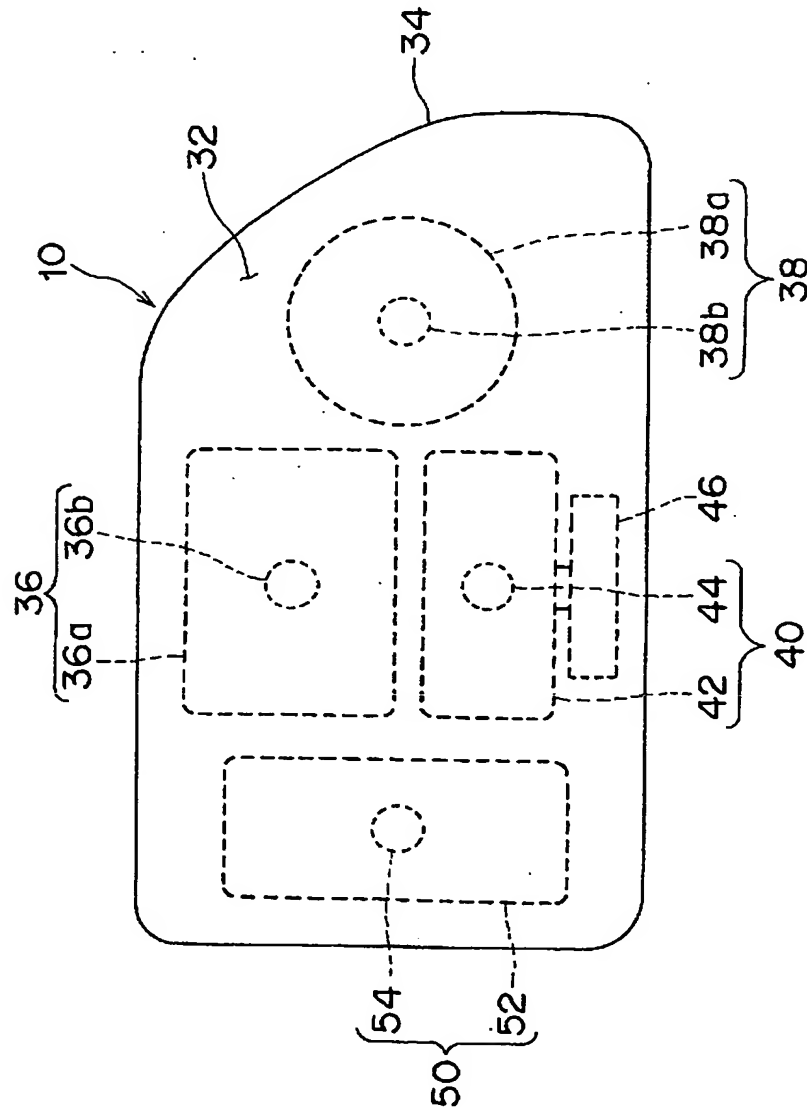


Fig. 3


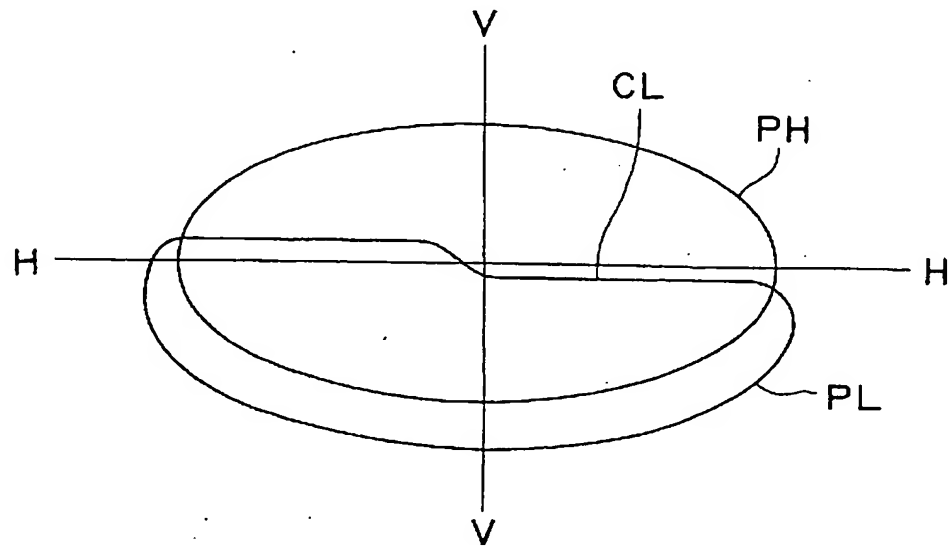


Fig. 4

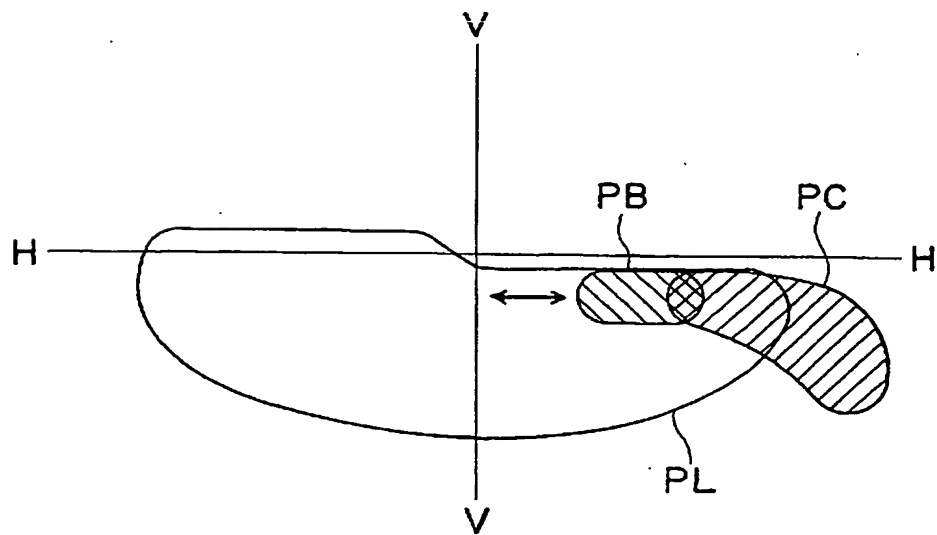

整理番号 = P - 2 2 1 0

特願2001

Fig. 5A


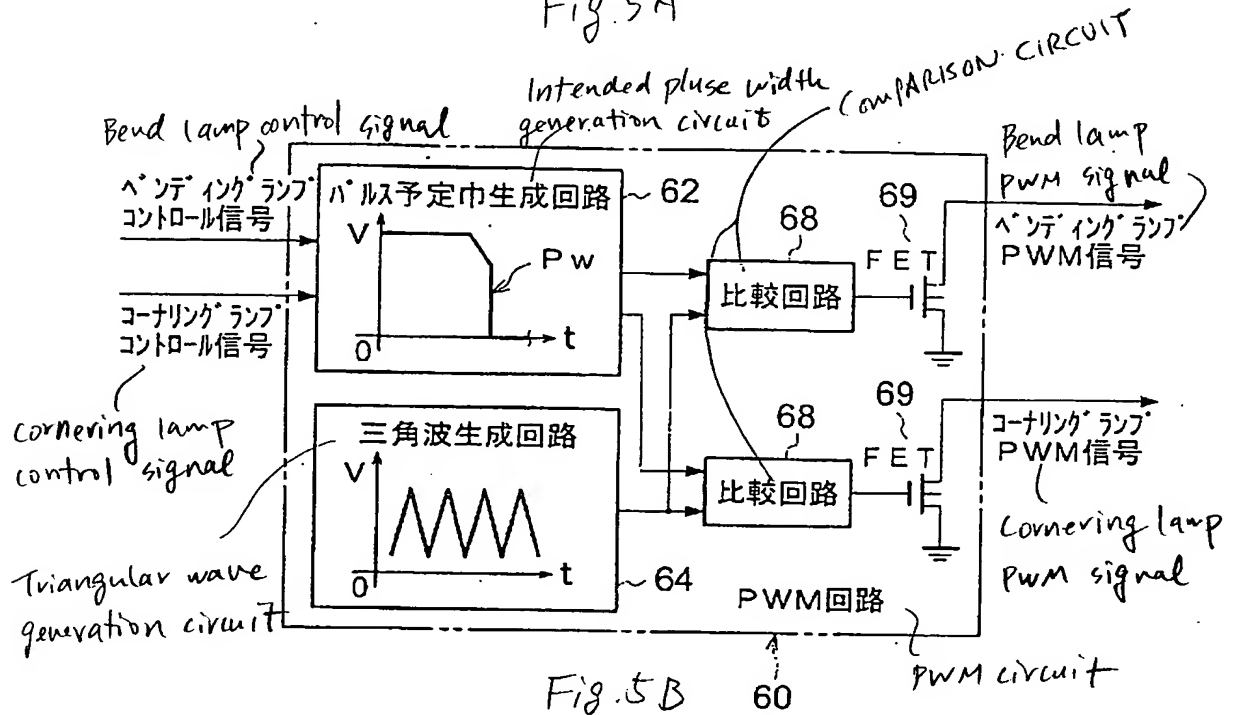



Fig. 5B

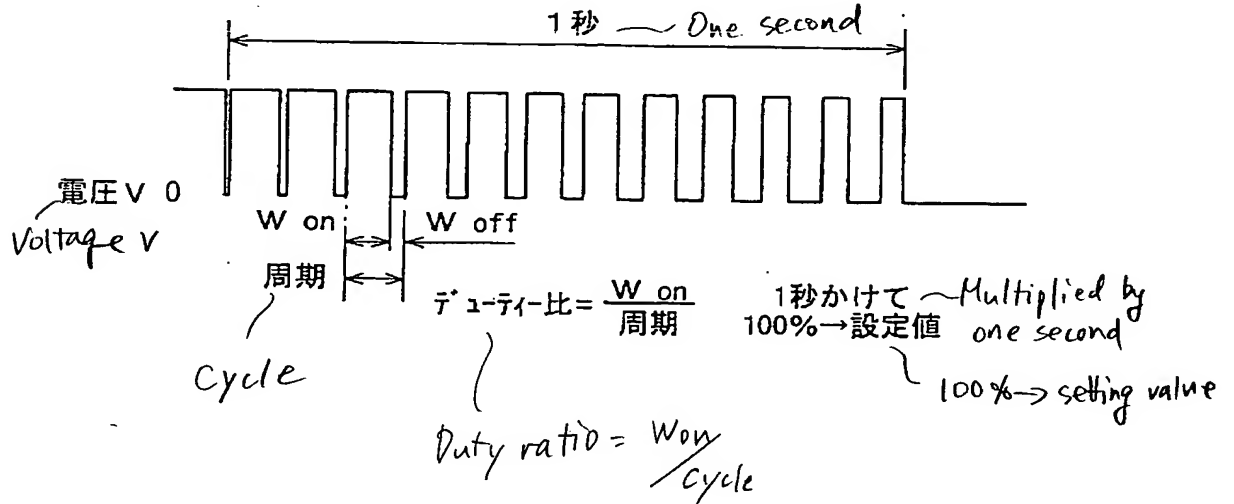

整理番号 = P - 2 2 1 0

特願2003


Fig. 6

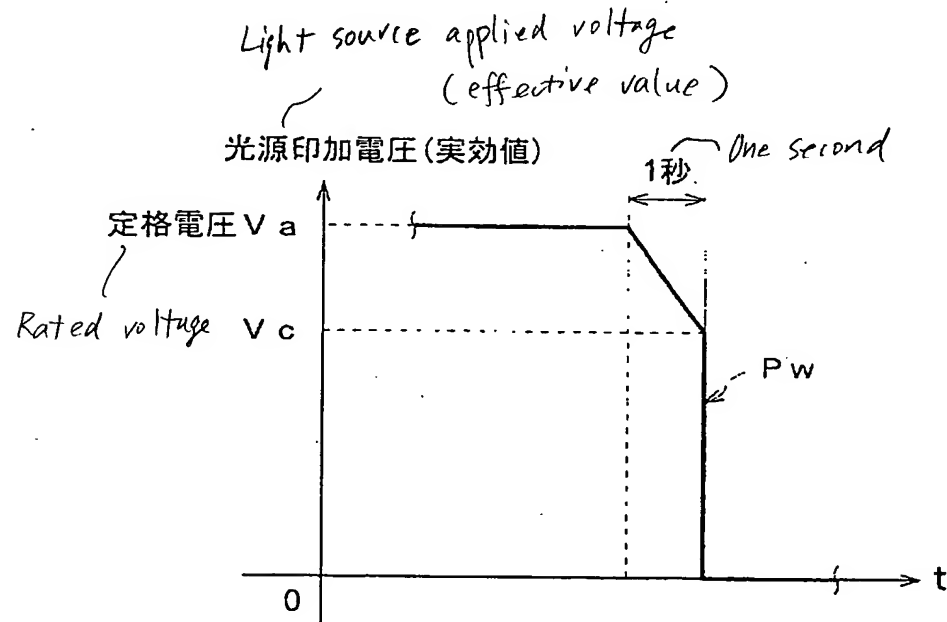

整理番号 = P - 2 2 1 0

特願200


Fig. 7

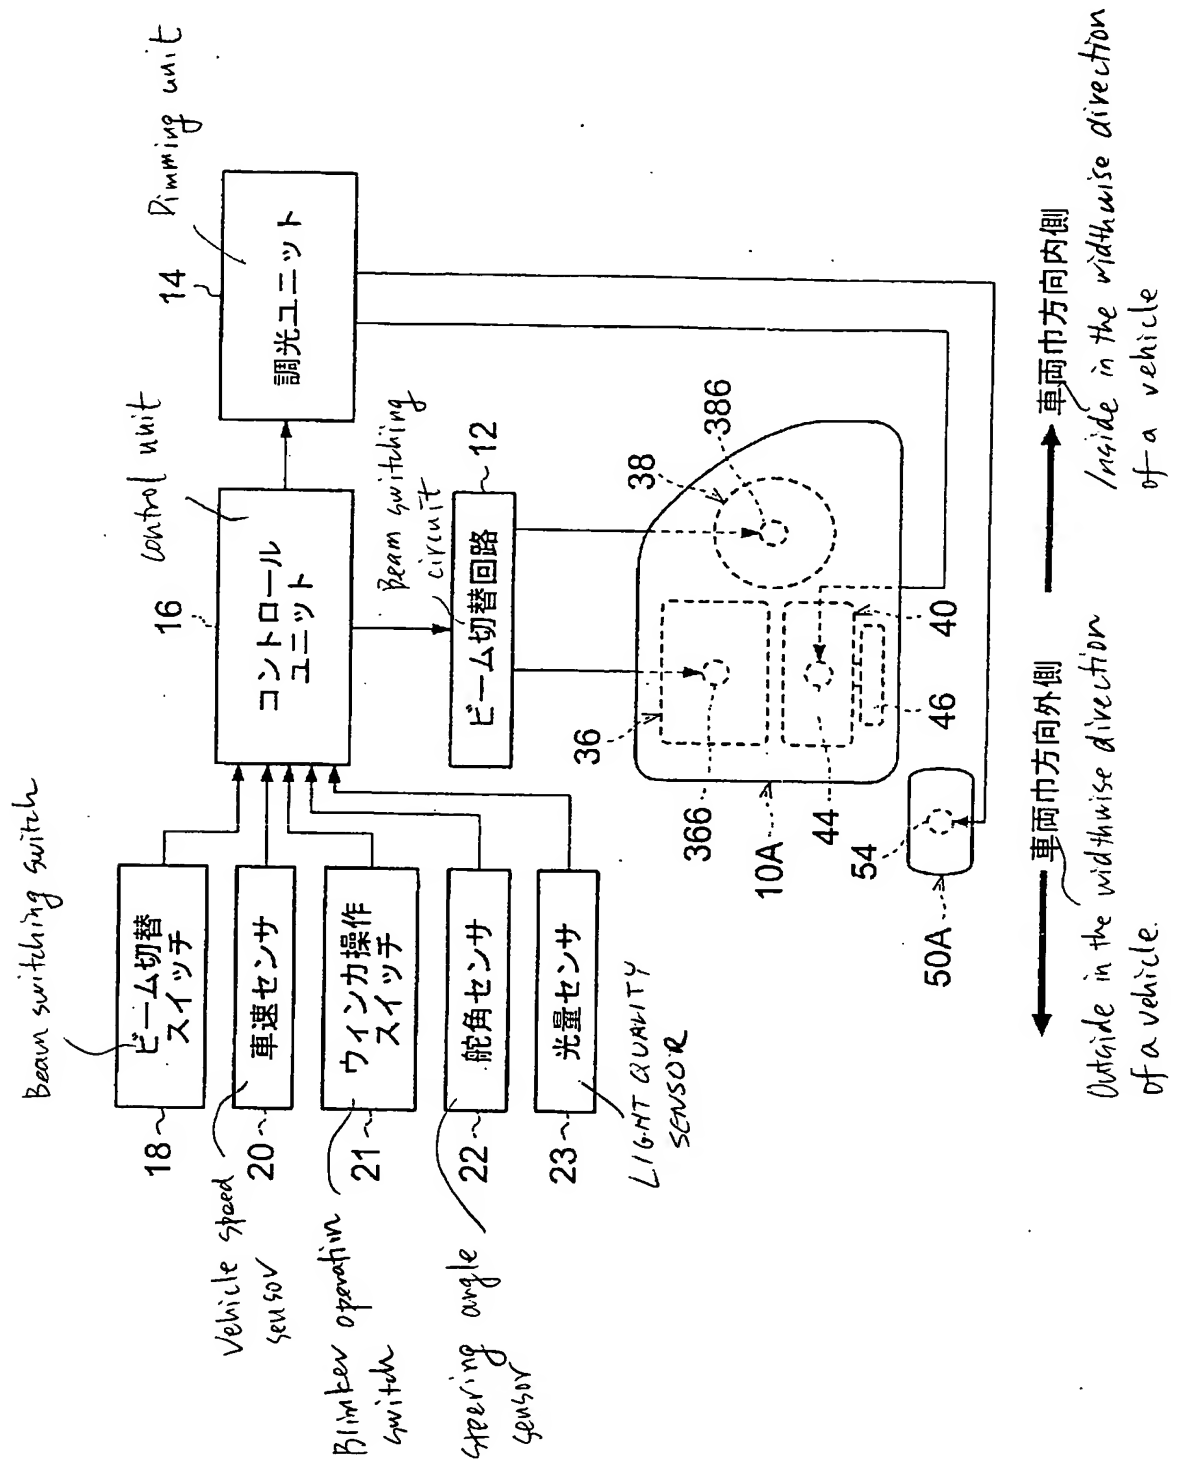

整理番号 = P - 2 2 1 0

特願2003-0

Fig. 8

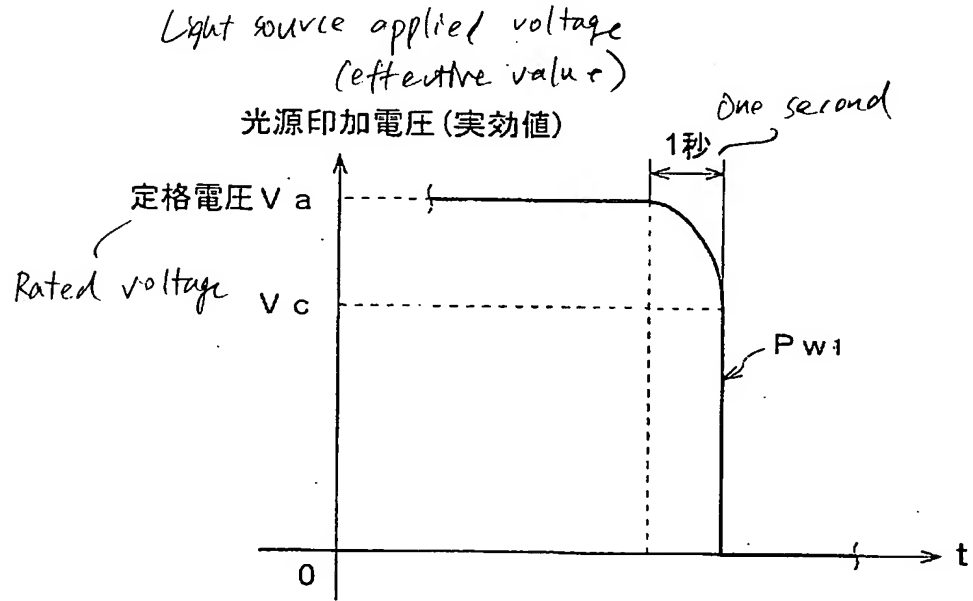

整理番号 = P - 2 2 1 0

特願2003-

Fig. 9

Lighting requirement		Average	平均	max	min	Deformation of filament
Continuous illumination (a) No dimming Blinking Dimming during extinction	点灯条件	連続点灯	619.6	878.8	287.6	変形なし
	点滅	(a) 調光なし	470.1	559.5	400.4	変形なし
		2秒 2 sec.	41.6	50.4	33.2	変形 Deformed
		(b) 1秒 1 sec.	274.8	490.1	114.7	変形 Deformed
	消灯時調光	0.5秒 0.5 sec.	420.2	679.2	298.8	変形 Deformed
		(d) 段階調光	486.6	638.5	393.3	変形なし
	(c) 電圧切替 Voltage switching	14/6V	254.3	499.0	79.6	変形 Deformed
		14/7V	38.9	49.9	26.7	変形 Deformed
		14/8V	18.9	25.7	6.2	変形 Deformed
		14/9V	62.6	116.6	24.1	変形 Deformed
		14/9.5V	250.0	280.0	138.9	若干変形する
		14/10V	514.5	667.0	308.5	現時点なし

Stopwise dimming

None at this time


Slightly deformed

整理番号=P-2210

特願200

日
13

Fig. 10

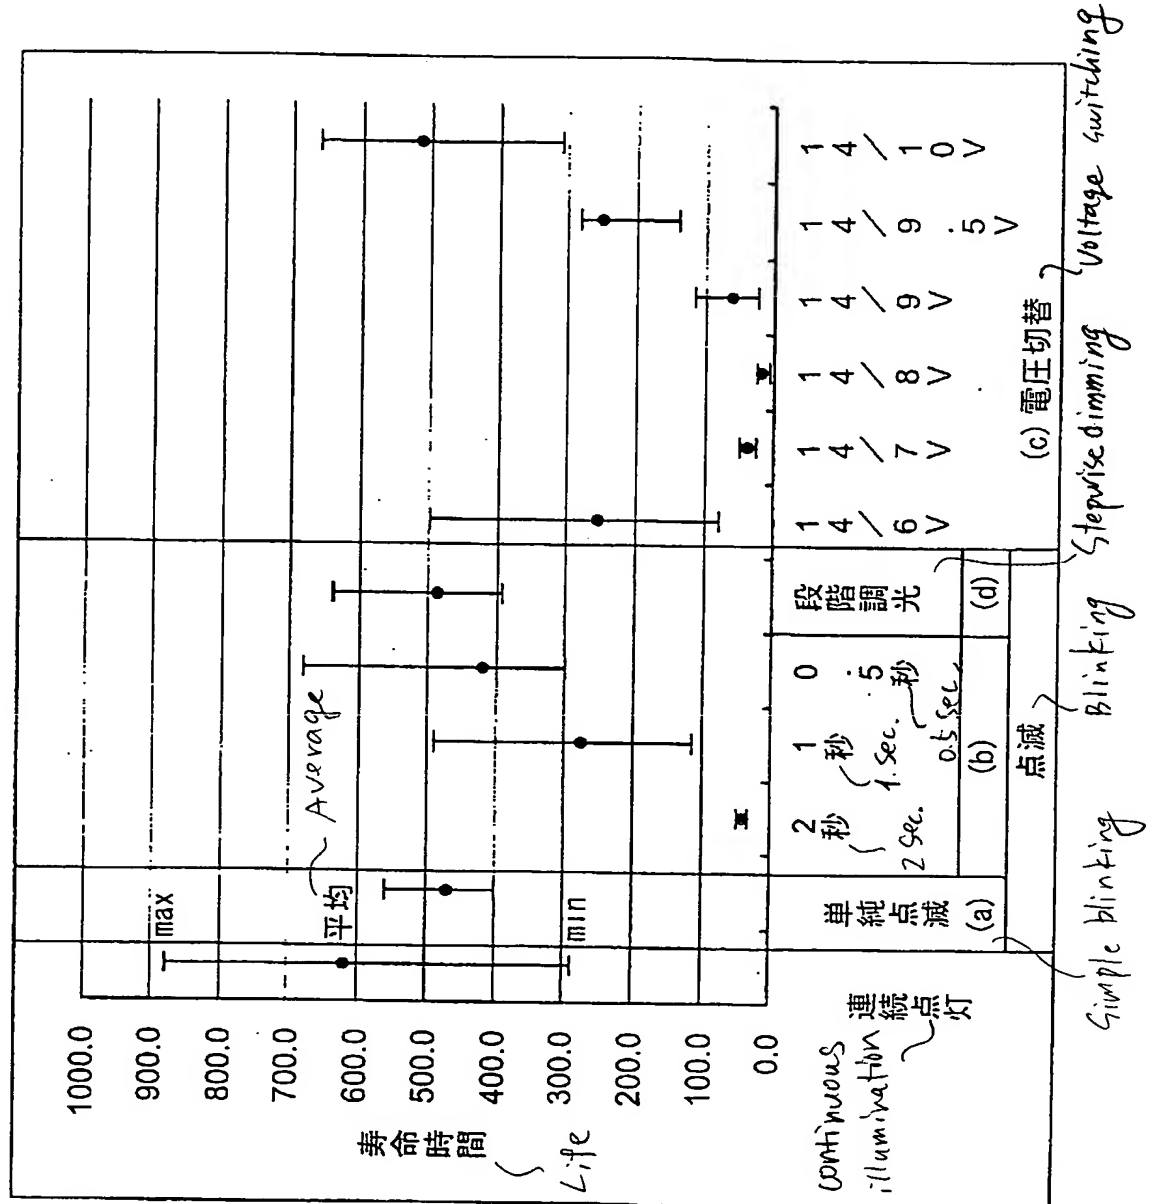

整理番号=P-2210

特願2003

Fig. 11A

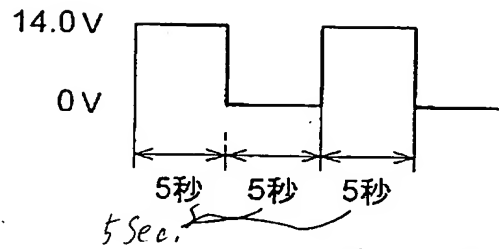


Fig. 11B

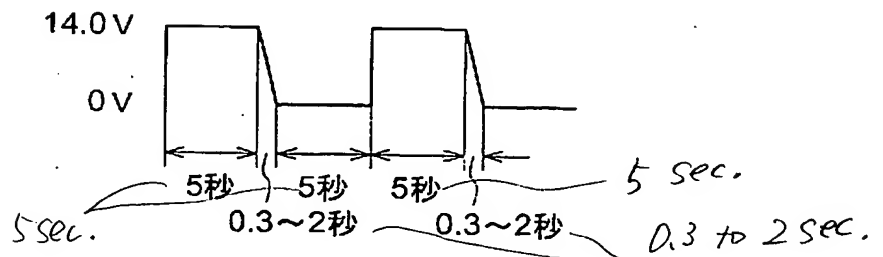


Fig. 11C


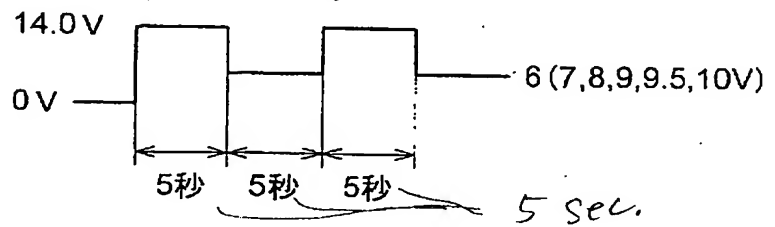


Fig. 11D

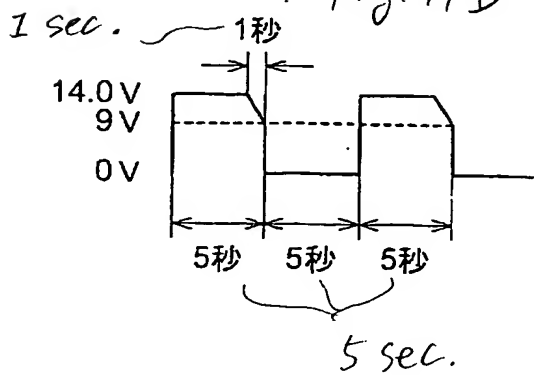

整理番号 = P - 2 2 1 0

特願2003-0

Fig. 12A


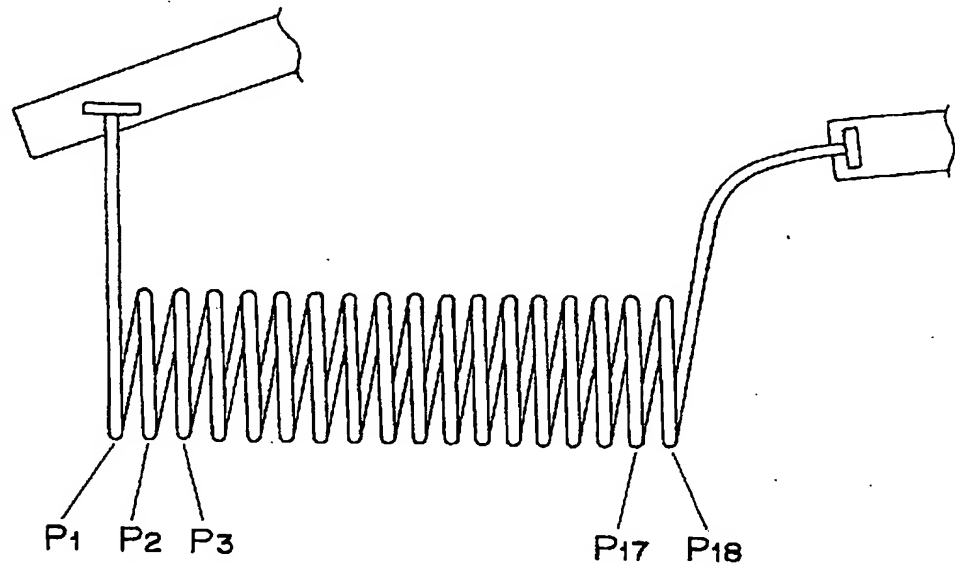


Fig. 12B

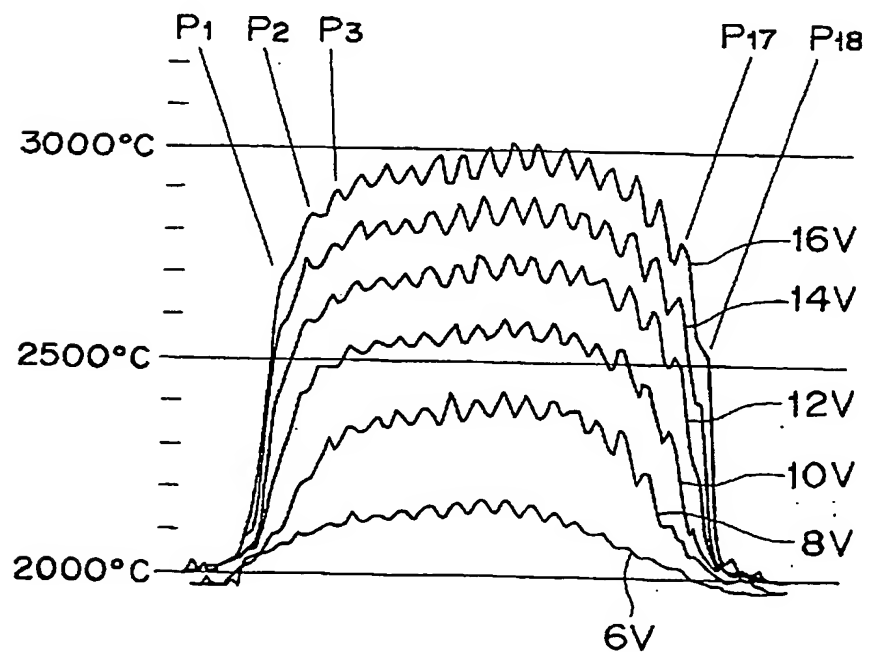

整理番号 = P - 2 2 1 0

特願2003-

Fig. 13A


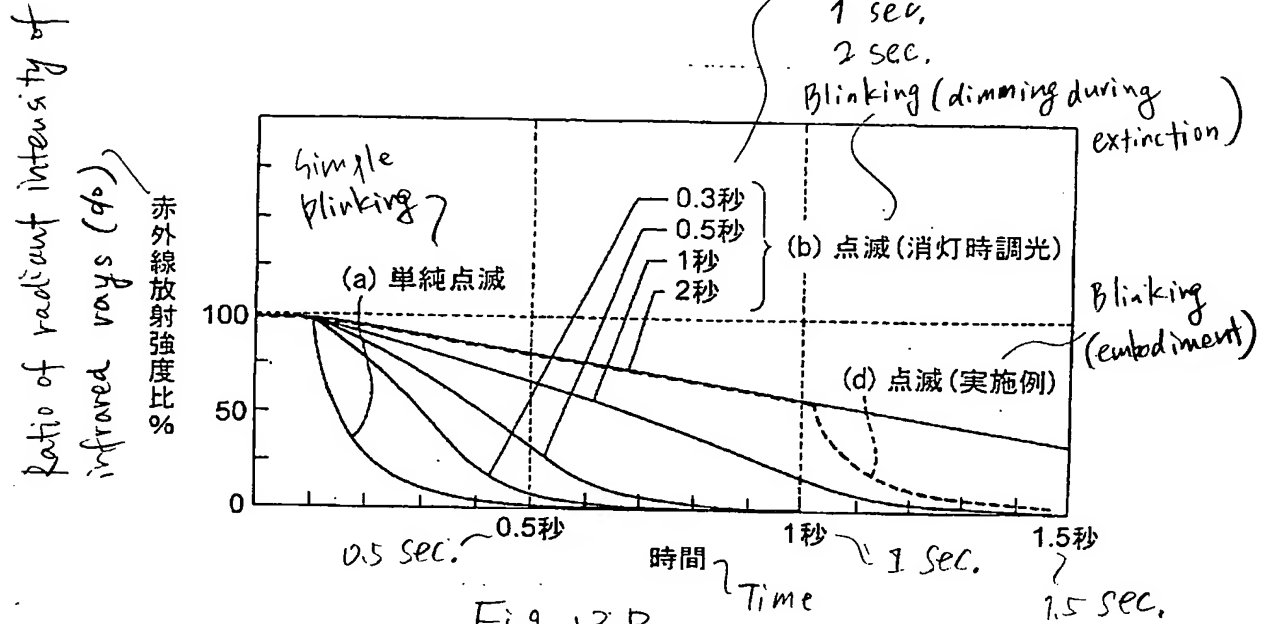


Fig. 13B

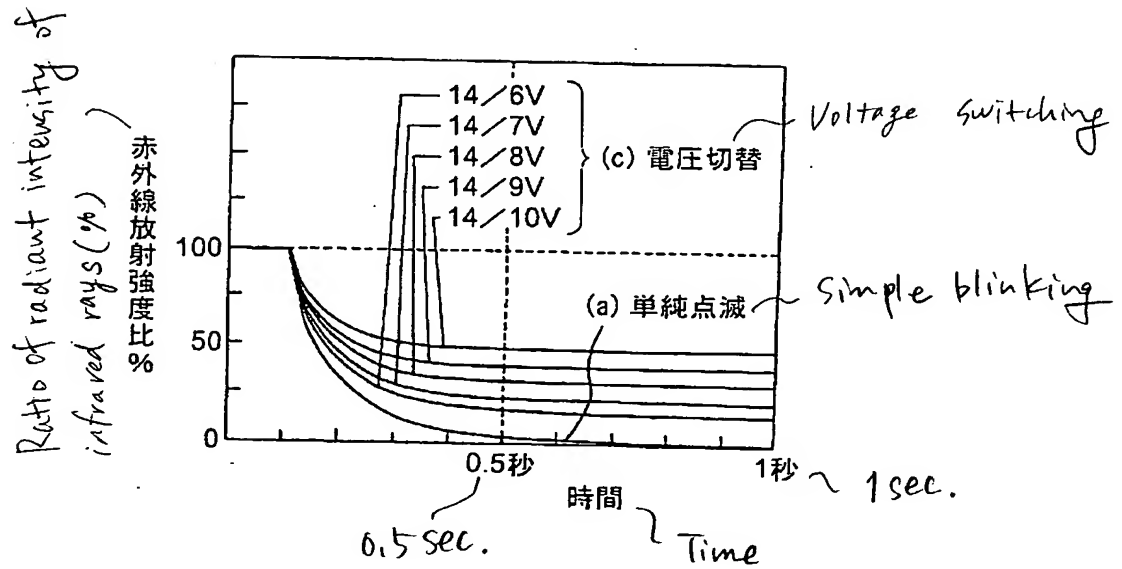

整理番号 = P - 2 2 1 0

特願2003-

Fig. 14A

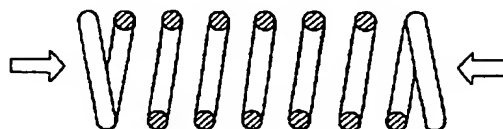


Fig. 14B

